



## CERTIFICATE OF GRANT OF UNITED KINGDOM PATENT

In accordance with Section 24(2) of the Patents Act, 1977, it is hereby certified that a patent having the specification No 2117523 has been granted to Glotzl Gesellschaft fur Baumesstechnik mbH (FR Germany) in respect of an invention disclosed in an application for that patent having a date of filing of 17 May 1982 being an invention for "Extensometer".

Dated this Twenty-ninth day of August 1985

IVOR DAVIS, CB  
Comptroller-General of Patents  
Designs and Trade Marks

THE ATTENTION OF THE PROPRIETOR IS DRAWN TO THE IMPORTANT NOTES OVERLEAF

Glotzl Gesellschaft fur Baumesstechnik mbH  
c/o Barlin Professional Services  
Barlin House  
20 High Street  
Carshalton  
Surrey SM5 3AG

A 36572

## IMPORTANT NOTES FOR PROPRIETORS OF UNITED KINGDOM PATENTS

### 1. DURATION OF PATENT & PAYMENT OF RENEWAL FEES

- (i) A patent takes effect on the date shown at the foot of the certificate overleaf. Subject to the payment of renewal fees, it can be kept in force until the end of a period of 20 years from the date of filing the application for a patent.
- (ii) To maintain the patent in force, it is necessary for the proprietor or someone on his behalf to pay a prescribed annual renewal fee. Payment may be made not more than three months before the expiration of the fourth or relevant succeeding year from the date of filing the application for a patent and should be accompanied by Patents Form 12/77.
- (iii) The proprietor is responsible for ensuring that effective renewal arrangements are set up and maintained and that fees are paid on time. He should not await any communication from the Patent Office before paying the fee; an official reminder sent to the last recorded address for service within six weeks after the anniversary of the date of the patent is intended to alert the proprietor to possible failure of his renewal arrangements.
- (iv) If the form with the fee is not lodged in the Patent Office on or before the anniversary date of the patent, the fee cannot be accepted unless application for an extension of time to a maximum of 6 months is made and paid for on Patents Form 13/77. Thereafter if no renewal fee is received and no extension of time is requested, the patent will cease. No reduction of extension fees is made in the case of a patent endorsed "Licences of Right". When paying a renewal or extension fee it is advisable first to check the current scale of charges as these may change from time to time.

### 2. PROCEDURE FOR PAYMENT OF FEES

Patents fees are payable direct to the Patent Office by means of cash, money order, postal order, banker's draft or cheque. (Adhesive stamps will not be accepted in payment of fees). The prescribed fee must be submitted together with the appropriate completed Patents Form; in addition each form or batch of forms should be accompanied by a fee sheet (FS. 1) showing details of the form(s) and the amount(s) of the fee(s). Cheques, money orders, etc., should be made payable to "The Comptroller-General, Patent Office", and crossed. Patents Forms, together with the fees and fee sheet (FS. 1) may be delivered to the Patent Office in London either by hand or post; those sent by post should be addressed to "The Cashier, The Patent Office, State House, 66-71 High Holborn, London WC1 4TP

Blank Patents Forms and fee sheets (FS. 1) can be obtained from the Clerk of Stationery, The Patent Office, 25 Southampton Buildings, London WC2A 1AY.

### 3. REGISTRATION OF OWNERSHIP AS EVIDENCE OF ENTITLEMENT

Any person who claims to have acquired the property in a patent by virtue of any transaction, instrument or event shall be entitled as against any other person who claims to have acquired that property by virtue of an earlier transaction, if application is made to the comptroller for registration in the register of patents (see Sections 32 and 33 of the Patents Act 1977). Particulars as to the manner of making such application may be obtained from the Patent Office.



---

(12) UK Patent (19) GB (11) 2 117 523 B

---

(54) Title of invention

**Extensometer**

(51) INT CL<sup>4</sup>; G01B 3/30 G01N 33/24

---

(21) Application No  
**8214318**

(22) Date of filing  
**17 May 1982**

(30) Priority data

(31) **3211822**

(32) **31 Mar 1982**

(33) **Fed Rep of Germany (DE)**

(43) Application published  
**12 Oct 1983**

(45) Patent published  
**29 Aug 1985**

(73) Proprietors  
**Glitzl Gesellschaft fur  
Baumesstechnik mbH  
(FR Germany)  
Forlenweg 11  
7512 Rheinstetten 4-Forchheim  
Federal Republic of Germany**

(72) Inventors  
**Rainer Glitzl  
Franz Glitzl**

(74) Agent and/or  
Address for Service  
**Barlin Professional Services,  
Barlin House,  
20 High Street,  
Carshalton,  
Surrey SM5 3AG**

---

(52) Domestic classification  
**G1S 1D 1F 4A**

(56) Documents cited  
**GB 1453260  
GB 1337015  
GB 1025728**

(58) Field of search  
**G1S**


LONDON THE PATENT OFFICE

Reprinted front page

GB 2 117 523 B

1/1

2117523

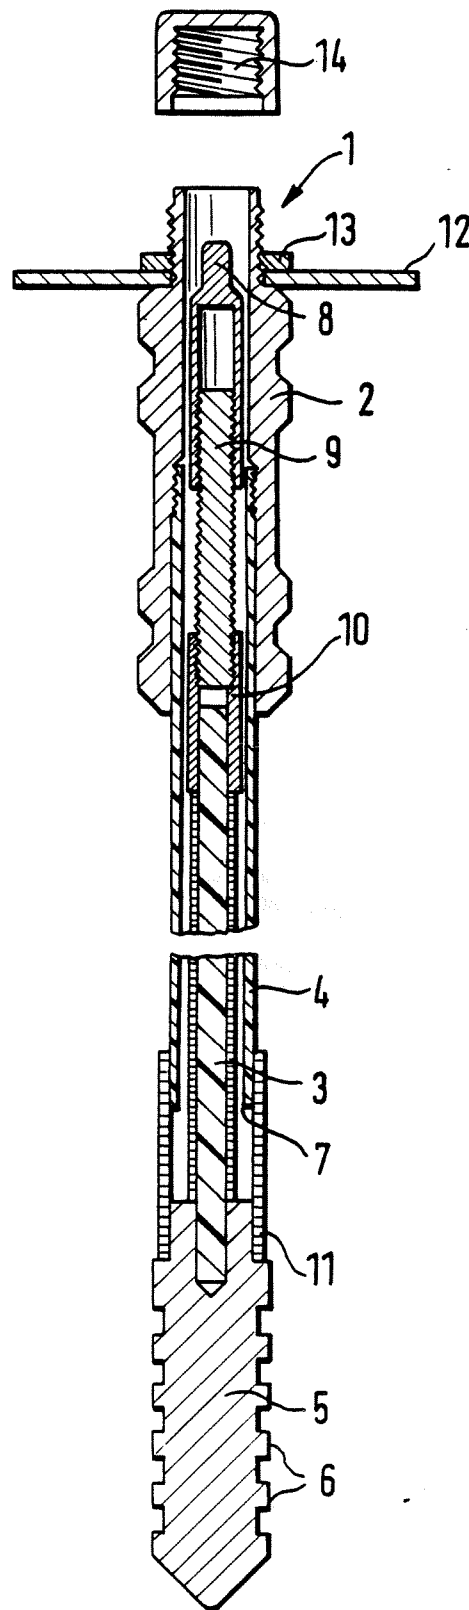

EXTENSOMETER

2117523

The invention relates to an extensometer for measuring movements in rock structures and in foundations, particularly the movement of layers of rock, consisting of an anchor-type device to be secured at the measuring point, a measuring rod connected therewith, freely movable in an encasing tube and bearing a pick-up element at its free end, and an extensometer head connected with the encasing tube and secured at the pick-up point, the change in the position of the pick-up element of the measuring rod in relation to the extensometer head being measurable (hereinafter called a rod extensometer of the type described).

Extensometers of the aforementioned design are mainly used for measuring movement in rock layers, e.g. in the building of tunnels and earth dams, but are also employed for measuring subsoil displacements in structures above the surface. The measuring operation normally consists of the measurement of the difference between various layers as regards their movement, so that in general a number of separate extensometers are sunk to different depths and their respective changes in position measured.

In practice there are two main types of measuring apparatus, that is the wire extensometer and the rod extensometer. In the former type a wire is taken from the point at which the extensometer is secured in the rock to the head of the extensometer, where it is deflected by a roller and loaded with a weight. Any movement occurring in the subsoil causes the wire to perform a corresponding

movement on the roller, which is equipped with a length measuring attachment. Changes are thus recorded by a distance measuring operation. Wire extensometers are thus difficult to instal, particularly when the securing points are very deep down, but difficulties are also encountered when a number of extensometric measurements have to be carried out in a limited space.

The rod-type extensometers described above have proved satisfactory in their place, the change in the position of the rod being measured by its pick-up element, such as a meter or a probe, on the extensometer head. However, the measuring operation, if carried out at great depths, again involved considerable expense and labour, as the rod system consisted of separate sections which had to be manipulated by hand, which were interconnected by couplings and which were built into the borehole one after the other. Under these circumstances it was not only the constructional outlay as such that proved a drawback but in many instances the time taken to insert the extensometer as well. There are many spheres of application, such as in tunnel building, after the termination of the base, when at a very early stage, for example during the first few hours and days, measurements are required which in their turn are decisive for the lining and safety operations in such structures.

An object of this invention is to construct a rod extensometer of the type described in such a way that even when measurements are being carried out at great depths the desired measurements can be taken rapidly and at an early stage.

A further object is to provide a rod extensometer which can be easily installed and transported.

Accordingly this invention provides an extensometer for measuring movements in rock structures and in foundations, particularly the movement of layers of rock, comprising an anchoring device adapted to be secured to the structure, a flexible measuring rod made in one piece from reinforced plastics material and carrying a protective coating thereon, the rod having one end connected to the anchoring device and having a free end bearing a pick-up element, an encasing tube encasing the measuring rod and in which the measuring rod is freely movable, and an extensometer head elastically connected via the encasing tube to the enclosing device so as to be adjacent the pick-up element and adapted to be secured, in use, to a fixed structure remote from the anchoring device, the change in the position of the pick-up element in relation to the extensometer head being measurable. The construction according to the invention offers the following advantages:

There is nowadays an abundance of reinforced plastics materials which on the one hand are flexible up to a bending radius of 50 cm. for example, while on the other hand they have sufficient resilience to return from the bent to the linear shape. This makes it possible for an extensometer rod made in one piece over its entire length to be inserted without difficulty into the borehole, even if this extends to depths of up to 100 m. the rod resuming its linear shape after insertion. The only operations required on the building site, therefore, are to make the necessary drillings,

- insert the rod and its encasing tube with the anchoring device into the borehole in advance, secure the anchoring device at the measuring point by injection and then mount the extensometer head. Its installation can thus be
- 5 speeded up considerably by comparison with known types of equipment. A further simplification as regards both the transport and the insertion results from the fact that the measuring rod according to the invention can be situated on a delivery spool with a suitable radius of
- 10 curvature and supplied in the desired length and in its complete form to the building site or else cut to the desired length after reaching the site and then completed. The extraction of such extensometers, if required, is likewise a simpler and more rapid process than before.
- 15 The protective covering improves the rod's wear-resistance for example, even if the movement of the rod inside the encasing tube is not accompanied by any appreciable frictional forces.
- In one version of the invention the plastics rod can be
- 20 stuck, screwed or otherwise inserted in a bore, of the anchoring device. This can be a relatively simple connection, as it is not called upon to transmit any appreciable forces. In a further version of the invention the plastics rod is connected with the pick-up element via a threaded coupling.
- 25 This pick-up element can thus be added at a later stage, particularly after the installation of the rod.
- The threaded coupling may advantageously consist of a threaded sleeve screwed onto the plastics rod and of a threaded bar which is connected with the said sleeve and onto



which the pick-up element can be screwed.

The range of adjustment can be extended still further by removing and replacing the threaded bar.

An embodiment of extensometer in accordance with the  
5 invention will now be described by way of example only,  
with reference to the accompanying drawing which shows a  
longitudinal section through an extensometer.

The drawing shows the extensometer in the installed

position. The parts essential to its function consist of a measuring head 1 with an extensometer head 2, a measuring rod 3 with its encasing tube 4 and an anchoring device 5. The measuring rod 3 is formed from a one piece flexible plastic bar 3 reinforced, for example, with fibre glass, and extending over the entire depth of the borehole and affixed at its lower end to the anchoring device 5 by means of screws, an adhesive, or similar means. The anchoring device is provided with an external profiling 6 to enable it to be faultlessly secured at the measuring point in the rock layer to be examined, in which it is fixed, for example, by an injection of concrete. The plastic bar 3, or at least that part of it which is situated in the encasing tube 4, is provided with a protective coating 7. The free upper end of the plastic bar 3 is connected to a pick-up element 8 via a threaded coupling. The threaded coupling consists of a threaded bar 9 and a threaded sleeve 10 into which the threaded bar is inserted and which in its turn is screwed onto the free end of the plastic bar 3. The pick-up element 8, provided with an internal threading, is screwed onto the other end of the threaded bar 9. The internal threading of the pick-up element 8 enables the said pick-up element to be readjusted to the measuring head 1 after the insertion of the extensometer. The adjustment range can be increased by removing the threaded bar 9 and inserting a shorter or longer threaded bar.

The encasing tube 4 surrounding the plastic bar 3 likewise consists of plastic, such as polyvinyl-chloride and is connected to the anchoring device 5 via an elastic sleeve 11. The other end of the encasing tube rests in the extensometer head 2, in which it is secured, for example, with an adhesive. The outside of the extensometer head 2 is provided with a number of hexagonal profiles situated one above the other. A mounting plate 12 with a check nut 13 is placed on this extensometer head. Finally, the extensometer head can be closed by a threaded cap 14.

The mounting plate 12 can be designed to accommodate a number of measuring heads 1 of extensometers of different lengths, in which case the heads 2 of these extensometers can be placed close together in a simple manner by allowing the hexagonal surfaces to rest against one another.

A change in the position of the anchoring device 5 or a movement of the rock layer by which it is secured will manifest itself in a change in the position of the pick-up element 8 in relation to the mounting plate 12 or the extensometer head 2, so that it can be measured by means of a distance measuring apparatus, e.g. a meter or similar device, on the said pick-up element.

CLAIMS

1. An extensometer for measuring movements in rock structures and in foundations, particularly the movement of layers of rock, comprising an anchoring device adapted to be secured to the structure, a flexible measuring rod made in one piece from reinforced plastics material and carrying a protective coating thereon, the rod having one end connected to the anchoring device and having a free end bearing a pick-up element, an encasing tube encasing the measuring rod and in which the measuring rod is freely movable, and an extensometer head elastically connected via the encasing tube to the anchoring device so as to be adjacent the pick-up element and adapted to be secured, in use, to a fixed structure remote from the anchoring device, the change in the position of the pick-up element in relation to the extensometer head being measurable.
2. An extensometer according to Claim 1 in which the anchoring device has a bore in which said one end of the measuring rod is secured.
3. An extensometer according to Claim 1 in which said free end of the measuring rod is connected to the pick-up element by a coupling device allowing initial adjustment of the position of the pick-up element relative to the extensometer head.
4. An extensometer according to Claim 3 in which the coupling device consists of a threaded sleeve screwed onto said one end and a threaded bar connected to said sleeve and onto which the pick-up element can be screwed.
5. An extensometer substantially as described herein with reference to or as illustrated in the accompanying drawings.